



Tracker Installation Guide for units with internal antenna


Where to Mount the SolarTrak Box

Ensure that the tracker has clear view of sky overhead and that the **label with the serial number is facing down** for proper GPS reception.

Installing the Tracker

Tracker should be attached to your equipment with provided hardware, or another similar method to ensure a secure mounting.

1. Install the tracker - label down. Make sure it will be within reach of the battery connection.
2. Connect the tracker's power wires to the equipment's battery to provide 12 to 24 VDC to SolarTrak. The wire with the fuse holder **MUST** be attached to the Positive (+) battery terminal. Coil any excess wire loosely.
3. Last, connect the tracker to the battery using the gray waterproof connector.

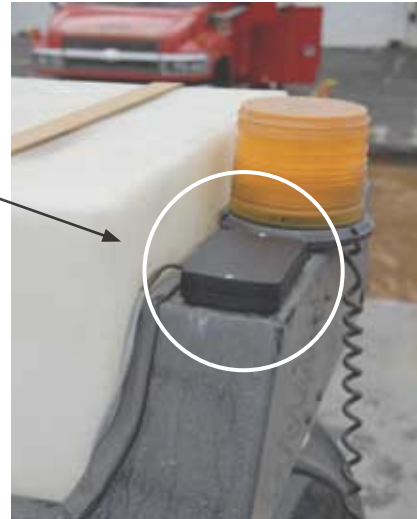

After Installation

- A. Tell your company's SolarTrak Administrator which SolarTrak unit (using the unit's serial number) has been installed on which piece of equipment. Tell your administrator the Manufacturer, the Model number, plus any company identifier (like your inventory number).
- B. Once installation is completed, the equipment will appear in SolarTrak online in the "Trackers" view as "Unassigned".
- C. Once your company's SolarTrak Administrator assigns a specific SolarTrak unit to a specific piece of equipment, the equipment will appear online in the Map View and List View and can be tracked.

That's it. If you have any questions,
feel free to call SolarTrak Support at **1-484-223-4994**

Ideal Installations:



GOOD INSTALLATION LOCATIONS:

On roofs, with constant access to the sky. Out of harm's way. **Side with white label faces the ground.**

BAD INSTALLATION CHOICES



Do not install on moving parts



Do not install on sides of vehicles without constant access to the sky. These locations will prevent the GPS from working correctly..

SolarTrak was designed by

